



ITT

Conoflow

Regulators, Transducers, Actuators, Positioners & Accessories



Engineered for life

www.conoflow.com

TABLE OF CONTENTS

PAGE PRODUCT CONTENTS

- 1 GFH45 Filter Regulator
FR95 Filter Regulator
GFX02 Filter
GFX04 Filter
- 2 GH04 Cushion Loading Regulator
GH10 Manual Loading Regulator
GH20, GH40 Service Regulator
- 3 GH20VT, GH40VT Vacuum Regulators
GH28VT Vacuum Regulator
GH22, GH42 Ratio Relays
GH232T Reversing Relay
GH30 Back Pressure Regulator (Low Pressure)
- 4 GH21XT, GH41XT Fixed Differential Regulators
GH21F, GH41F Fixed Differential Regulator
GH21AT, GH41AT Adjustable Differential Regulators
GH31 Upstream Differential Regulator
- 5 GDH Purge Assemblies
- 6 HP300 High Pressure Regulator – Piston Type
HP500 High Pressure Regulator – Diaphragm Type
- 7 HP600 High Pressure Regulator – Tied Diaphragm Type
HP610 High Pressure Regulator – Diaphragm Type
HP635 High Pressure Regulator – Diaphragm Type – Cv1.8
HP700 High Pressure Regulator – Diaphragm Type / Two Stage
- 8 GT210 / GT410 / GT610 IP-EP Transducer
GT-8 Series IP Transducer
GT25, GT45, GT65 Series IP Transducer – IEEE Qualified
GFH25 Series Filter Regulator - IEEE Qualified
- 9 GB50X – GB55X Series Linear Actuators
GB52U – GB54U Series Linear Actuators – Yoke Style
GB52S – GB53S Series Actuators – Lever Style
GB2700 – GB2800 Manual Operators
Fail Safe Systems for Actuators

PAGE PRODUCT CONTENTS

- 10 GC31 – GC34 Series Positioners – Top Mounted
GP50, GP51, GP52 Series Positioners – Side Mounted
- 11 HPNGV1 Natural Gas Vehicle Regulator
GVB11, GVB12 Snap Acting Relays
- 12 100A, 100AC Diaphragm Seals – Threaded Off-Line
140K, 140KT Diaphragm Seals – Threaded Off-Line – All Welded
190K Diaphragm Seal – Threaded Off-Line – All Welded
300A, 330A, 600A Diaphragm Seals – Threaded Off-Line
400A, 400AC Diaphragm Seals – Threaded Off-Line
360A Diaphragm Seal – Threaded Off-Line – All Welded
100AM Diaphragm Seal – Threaded In-Line
300AM Diaphragm Seal – Threaded In-Line
100B Diaphragm Seal – Flanged Off-Line
300B Diaphragm Seal – Flanged Off-Line
360B Diaphragm Seal – Flanged Off-Line – All Welded
300BX Diaphragm Seal – Flanged Off-Line – Extended
330B Diaphragm Seal – Flanged Off-Line
400B Diaphragm Seal – Flanged Off-Line
600B Diaphragm Seal – Flanged Off-Line
- 13 100J3, 100J4 Diaphragm Seal – Saddle Welded
300J3, 300J4 Diaphragm Seal – Saddle Welded
100L Diaphragm Seal – Butt Welded In-Line
300L Diaphragm Seal – Butt Welded In-Line
100M Diaphragm Seal – Socket Welded In-Line
300M Diaphragm Seal – Socket Welded In-Line
100N Diaphragm Seal – Flanged In-Line
300N Diaphragm Seal – Flanged In-Line
100S Diaphragm Seal – Socket Welded In-Line
300S Diaphragm Seal – Socket Welded In-Line
300BP Diaphragm Seal – Pancake Series
300BT Diaphragm Seal – “T” Type Series
600TW Diaphragm Seal – Taylor Wedge Series
- 14 700C Series Diaphragm Seal – Sanitary
700A Series Diaphragm Seal – Sanitary
700D Series Diaphragm Seal – Sanitary
700CEX Series Diaphragm Seal – Custom Designs
700C-7 Series Diaphragm Seal – Tank Spud Style
- 15 Mounting Options
Fill and Calibration Options
Calibration Rings

Product performance

Low Pressure - Filter Regulators and Filters



FR95 AirPak

Product Series / Features (Pressure Reducing / Filtration)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
FR95 Airpak, Filter-Regulator Stable Output High Flow Capacity Excellent Droop Characteristics Bubble Tight Shut-Off Low Air Consumption Black Anodized Corrosion Resistant Exterior	250 PSIG	0-25, 0-35, 0-60, 0-125 PSIG	Cv = 0.5 25 SCFM	Aluminum
GFH45 Airpak, Filter-Regulator Stable Output High Flow Capacity 10, 35 and 40 Micron Filter Elements Buna N and Viton Elastomers All Brass Construction	300 PSIG	0-25, 0-60, 0-125 PSIG	25 SCFM	Brass
GFX02 Filter (No Regulation) No Filtration All Brass Construction Optional Mounting Bracket 10, 35 and 40 Micron Filter Elements	300 PSIG	No Regulation	75 SCFM	Brass
GFX04 Filter (No Regulation) No Filtration All Aluminum Construction Optional Mounting Bracket 10, 35 and 40 Micron Filter Elements	300 PSIG	No Regulation	75 SCFM	Aluminum



GFH45 AirPak



GFX02/GFX04 Filters

Product performance

Low Pressure - Pressure Reducing Regulators



GH04 Series

Product Series / Features (Pressure Reducing Regulators)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
GH04 Cushion Loading Regulator Compact Size Multiple Outlet Ports Soft Seated for Cushion Loading Actuators	300 PSIG	0-60 PSIG	2 SCFM	Aluminum
GH10 Manual Loading Regulator Wide Range of Outlet Settings Excellent Sensitivity Multiple Diaphragm Material Options Relieving and Non-Relieving Models Tamper-proof and Preset Versions Wide Range of Materials of Construction Metal to Metal Seated and Soft Seated Options	200 / 300 PSIG	0-3, 0-5, 0-15, 0-25, 0-35, 0-50, 0-125 PSIG	10 SCFM	Aluminum Brass 316SS
GH20/GH40 Service Regulators Relieving and Non-relieving Options Multiple Diaphragm Material Options Tamper-proof and Preset Versions High Exhaust Capacity Versions Available Wide Range of Materials of Construction Metal to Metal Seated and Soft Seated Options	200 / 300 PSIG	0-25, 0-60, 0-125 PSIG	20 SCFM	Brass 316SS



GH20 / GH40 Series

Product performance

Low Pressure - Specialty Regulators

	Product Series / Features (Specialty Regulators)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
 <p>GH20VT Series</p>	Vacuum Regulators GH20VT Vacuum Regulator External Sensing Port Six Diaphragm Material Options 15" and 30" Hg Vacuum Settings Wide Range of Materials of Construction Metal to Metal Seated and Soft Seated Options	Vacuum	0-15" Hg 0-30" Hg	1.5 SCFM	Brass 316SS
 <p>GH28VT Series</p>	GH28VT Vacuum Regulator Internal Sensing Port Three Outlet Ports Compact Design Light Weight - 1Lb	Vacuum	0-15" Hg 0-30" Hg	1.5 SCFM	Aluminum
 <p>GH22 Series</p>	Ratio and Flow Boosting Relays GH22 Ratio and Boosting Relays Multiple Ratio Signal Outputs High Flow Capacity Ratios / Flow Boosting / Dividing Range Selections	200 PSIG	1:1, 1:2, 1:3, 2:1, 3:1	16 SCFM	Brass
	Reversing Relay GH232T Reversing Relay Convert Single Acting Positioner to Double Acting Model Reduces Cushion Load to Actuator in Proportion to Positioner Input	100 PSIG	Ratio Out to Input	10 SCFM	Brass
 <p>GH30 Series</p>	Back Pressure Regulators GH30 Back Pressure Regulators Wide Range of Outlet Settings Excellent Sensitivity Multiple Diaphragm Material Options Wide Range of Materials of Construction	150 PSIG	0-3, 0-5, 0-15, 0-25, 0-35, 0-50, 0-125 PSIG	2 TO 30 SCFM	Brass 316SS

Product performance


Low Pressure - Specialty Regulators

Product Series / Features (Specialty Regulators)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
 <p>GH21 / GH41 Series</p>	<p>Differential Regulators GH21XT/GH41XT Fixed Differential Regulator 200 PSIG</p>	<p>3 PSIG Fixed</p>	<p>2.5 SCFM</p>	<p>Brass 316SS</p>
 <p>GH21F / GH41F Series</p>	<p>GH21F/GH41F Fixed Differential Regulator 200 PSIG</p>	<p>3 PSIG Fixed</p>	<p>1.7 SCFM</p>	<p>Brass</p>
 <p>GH21AT/GH41AT Series</p>	<p>GH21AT/GH41AT Adjustable Differential Regulator 200 PSIG 300 PSIG</p>	<p>0-5, 0-15, 0-25, 0-35, 0-50, 0-125 PSIG</p>	<p>10 SCFH</p>	<p>Brass 316SS</p>
 <p>GH31 Series</p>	<p>GH31 Upstream Differential Regulator 100 PSIG</p>	<p>3 PSIG Fixed</p>	<p>10 SCFH</p>	<p>Brass 316SS</p>

Product performance

Low Pressure - Purge Assembly

Product Series / Features (Purge Assembly)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
GDH21 Purge Assembly Differential Regulator with Flow Indicator Brass and Stainless Steel Constructions Line and Panel Mount Options Multiple Diaphragm Material Options Metal to Metal Seated or Soft Seated Options	Varies Depending Flow Indicator	Line	20 to 200 cc/m (water)	Brass
		Line	0.25 to 2.5 SCFH	Brass
		Line	Sight Feed Bubbler	Brass
		Panel	Sight Feed Bubbler	Brass
		Line	25 to 250 cc/m (water)	Brass
		Line	0.1 to 2.0 SCFH	Brass
		Line	0.5 to 4.0 GPH	Brass
		Line	0.2 to 2.0 SCFH	Brass
		Panel	0.5 to 4.0 GPH	Brass
		Panel	0.2 to 2.0 SCFH	Brass
		Line	20 to 200 cc/m	Brass
		Line	0.1 to 2.0 SCFH	Brass
		Line	0.4 to 4.0 GPH	Brass
		Line	0.2 to 2.0 SCFH	Brass
		Line	20 to 200 cc/m (water)	316SS
		Line	0.2 to 2.0 SCFH	316SS
		Line	25 to 250 cc/m (water)	316SS
		Line	0.1 to 2.0 SCFH	316SS
		Line	0.5 to 4.0 GPH	316SS
		Line	0.2 to 2.0 SCFH	316SS
Panel	0.5 to 4.0 GPH	316SS		
Panel	0.2 to 2.0 SCFH	316SS		
Line	0.4 to 4.0 GPH	316SS		
Line	0.2 to 2.0 SCFH	316SS		

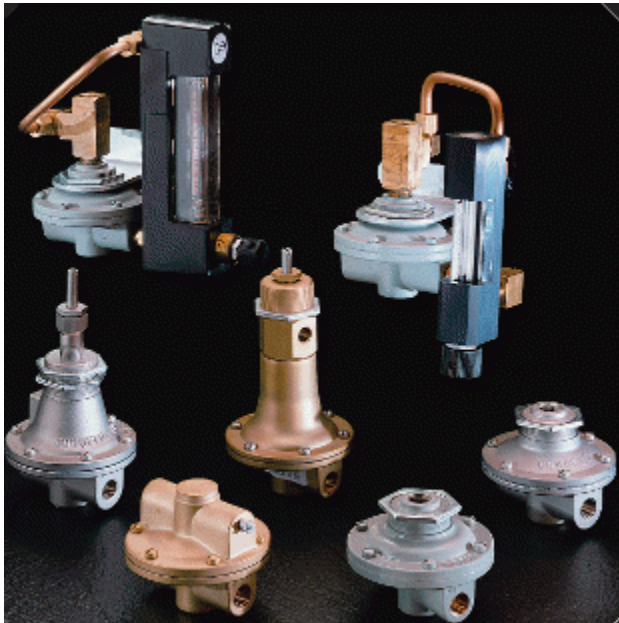

GDH Purge Assembly

Product performance

High Pressure - Pressure Reducing Regulators



HP300 Series

Product Series / Features (Pressure Reducing Regulators)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
HP300 High Pressure Regulator Piston Type 10,000 PSIG Supply Pressure Stainless Steel, Brass and N.A.C.E. Construction Multiple Control Range from 500 to 6000 PSIG Control Range can be Field Changed Panel Mounting Bracket Optional Non-Rising Stem CGA Cylinder Connections Available Cleaned to ITT Conoflow Specification ES8A 01 294	6000/10000 PSIG	8-500, 9-800, 10-1500, 15-2500, 25-4000, 30-6000 PSIG	Cv = 0.14	Brass 303SS N.A.C.E.
HP500 High Pressure Regulator Diaphragm Type Relieving and Non-Relieving Diaphragms Offered Design Leak Rate 2×10^{-8} atm cc/sec of Helium High Purity Internal Connections Optional Vacuseal, VCR, Ultra Seal and Welded Fittings Offered Five Regulated Outlet Ranges from 4-25 PSIG to 10-500 PSIG 15Ra Microinch Wetted Surfaces Available Optional 1/4" NPT Gauge Ports Metal to Metal Diaphragm to Body Seal Line and Rear Mounting are Standard Panel Mounting is Optional Brass, 316SS, N.A.C.E., Monel and Hastelloy Constructions Available CGA Cylinder Connections Available Cleaned to ITT Conoflow Specification ES8A 01 294	5000/6000 PSIG	4-25, 4-50, 5-100, 6-250 10-500 PSIG	Cv = 0.16	Brass 316SS 316LSS N.A.C.E. Monel Hastelloy



HP500 Series

Product performance

High Pressure - Pressure Reducing Regulators



HP600 Series



HP610 Series



HP635 Series



HP700 Series

Product Series / Features (Pressure Reducing Regulators)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
HP600 High Pressure Regulator Tied Diaphragm Type High Purity Internal Connections Optional 316SS, 316LSS and N.A.C.E. Constructions Available Vacuseal, VCR, Ultra Seal and Welded Fittings Offered Design Leak Rate 2×10^{-8} atm cc/sec of Helium Multiple Control Range Settings Available Rear Mounting Optional Standard Non-Relieving Diaphragm and Positionable Bonnet Standard Cleaned to ITT Conoflow Specification ES8A 01 294 5000 PSIG Maximum Supply Pressure Capability	3000/5000 PSIG	2-25, 3-50, 3-100, 4-150 PSIG	Cv = 0.15	316SS N.A.C.E.
HP610 High Pressure Regulator Diaphragm Type Relieving and Non-Relieving Diaphragm Options Internal Finish on Wetted Components 20Ra Inboard Leak Rate 2×10^{-8} atm cc/sec of Helium Cleaned to ITT Conoflow Specification ES8A 01 294 High Flow Capacity	250 PSIG	0-50 PSIG	Cv = 0.95	316SS
HP635 High Pressure Regulator Diaphragm Type Brass and Stainless Steel Construction NPT and Tube Stub Connections Offered High Flow Capacity - Cv 1.8 Optional Base Mounting and Panel Mounting Available 2×10^{-8} atm cc/sec of Helium Inboard and Across the Seal Leakage Five Control Range Settings Cleaned to ITT Conoflow Specification ES8A 01 294	500 PSIG	0-25, 0-50, 0-100, 0-150, 0-250 PSIG	Cv = 1.8	Brass 316SS
HP700 High Pressure Regulator Diaphragm Type 3500 and 6000 PSIG Maximum Supply Pressure Capabilities Captured Bonnet Ports Standard Design Leak Rate 2×10^{-8} atm cc/sec of Helium Brass and Stainless Steel Constructions Offered Tied Diaphragm Model Offered Control Ranges from 4-25 PSIG to 6-250 PSIG CGA Cylinder Connections Available Cleaned to ITT Conoflow Specification ES8A 01 294	3500/6000 PSIG	4-25, 4-50, 5-100, 5-150, 6-250 PSIG	Cv = 0.14	Brass 316SS 316LSS N.A.C.E.

Product performance

I/P-E/P-M/P-P/I Transducers



GT210/GT410/
GT610 Series



GT-8 Series

Product Series / Features (Transducer)	Input Signal	Outlet Pressure Ranges	Flow Capacity	Linearity
GT210/GT410/GT610 Transducers I/P-E/P Transducers Miniature Transducer Direct Connection to Terminal Block Factory Mutual Intrinsically Safe Offered 150 PSIG Maximum Supply Pressure EMI-RFI Adaptor Optional Filter Regulator (Mounted and Piped) Optional Optional 20" Long Lead Connections with Metal Cover 2" 'U' Clamp Mounting Hardware Offered	4-20, 10-50mA DC 0-5, 1-9 VDC Special Inputs Available	3-15, 3-27, 6-30 PSIG	12 SCFM	±0.5% of Span
GT-8 Series Transducer I/P Transducer External Zero Adjustment EMI-RFI Adaptor Available Factory Mutual Intrinsically Safe Optional CENELEC Intrinsically Safe Offered Factory Mutual Explosion Proof Optional Filter Regulator (Mounted and Piped) Optional Selector Jumper Switch to Accept 4-20 or 10-50mA DC Input 2" 'U' Clamp Mounting Hardware Offered	4-20, 10-50mA DC 0-5, 1-9 VDC Special Inputs Available	3-15, 3-27, 6-30 PSIG Special Outputs	0.15 SCFM 5 SCFM	±1%

IEEE Qualified Transducer and Regulator



I/P Transducer



Airpak Regulator

Product Series / Features (Regulator and Transducer)	Input Signal	Outlet Pressure Ranges	Flow Capacity	Linearity
GT25CA1826 IEEE Transducer GT25CD1826 IEEE Transducer without Regulator GT45CA1826 IEEE Transducer GT45CD1826 IEEE Transducer without Regulator GT65CA1826 IEEE Transducer GT65CD1826 IEEE Transducer without Regulator Qualified to the Requirements of IEEE 323-1974 Qualified to the Recommendations of IEEE 344-1975 Zamak 5 - Zinc Alloy Housing Viton Elastomers Thermal Aged, Wear Aged, Radiation Aged Seismic Qualification Testing Performed Steam Line Break Testing Completed	4-20, 10-50 mA DC	3-15, 3-27, 6-30 PSIG	5 SCFM	±0.75% of Span
GFH25XT1767C Airpak, Filter Regulator GFH25XT1767F Airpak, Filter Regulator GFH25XT1767G Airpak, Filter Regulator Thermal Aged, Wear Aged, Radiation Aged Brass Body and Bonnet Viton Elastomers Seismic Qualification Tested Steam Line Break Testing Completed Qualified to the Requirements of IEEE 323-1974 Qualified to the Recommendations of IEEE 344-1975	200 PSIG	0-25, 0-60, 0-125 PSIG	16 SCFM	Brass

Product performance

Linear and Lever Actuators



GB50 - GB55 Series



GB52S / GB53S Series



Fail Safe System

Product Series / Features (Linear and Lever Actuators)	Bore Diameter	Effective Areas	Stroke Lengths	Thrust
GB50X - GB55X Linear Actuators Fail Safe Systems Available Manual Operator Optional With and Without Spacer Bars and Lower Flange Multiple Bore Diameters and Thrust Capabilities Single and Double Acting Positioners - Top Mounted Offered Stroke Lengths up to 10" Single and Double Acting Positioners - Side Mounted Offered Lock in last Position Option Offered	3", 4", 6" 8", 10", 12"	7, 12, 28.5, 50, 78, 123 Square Inch	1/4" to 10"	Up to 12000 lbs.
GB52U - GB54U Linear Actuators Multiple Bore Diameters and Thrust Capabilities Single and Double Acting Positioners - Top Mounted Offered Fail Safe Systems Available Single and Double Acting Positioners - Side Mounted Offered Lock in last Position Option Offered Manual Operator Optional	6", 8", 10"	28.5, 50, 78 Square Inch	1-1/4" 1-1/2"	Up to 7800 lbs.
GB52S - GB53S Lever Actuators Lever Travels from 5" to 12" Single and Double Acting Positioners - Top Mounted Offered Fail Safe Systems Available Single and Double Acting Positioners - Side Mounted Offered Lock in last Position Option Offered Manual Operator Optional	6", 8"	28.5", 50"	Lever Travel 5" to 12"	Lever Thrust up to 1080 lbs.
GB2700 - GB2800 Manual Operators Large and Small Handwheel for Manual Operation	1500 / 4500 lbs. of Thrust			
Fail Safe Systems Fails Extended or Retracted Lock in last Position with Snap Acting Relay	57, 180, 400, 1000, 2100 Cubic Inch Tanks			

Product performance

Top and Side Mounted Positioners



GC31 - GC34 Series

Product Series / Features (Positioners)	Supply Pressure (maximum)	Stroke Lengths	Actions Increase Instrument Signal	
GC31 - GC34 Series Positioners Top Mounted - No Exposed Parts High Flow Capacity - 5 SCFM All Standard Spans and Splits Ranges Available Extend and Retract Actuator Stem on Increasing Signal Extend and Retract Actuator Stem on System Air Failure	100 PSIG	1/4" to 10"	Extends or Retracts	<1% of Span
GP50 / GP51 / GP52 Series Positioners Side Mounted Booster Valving for Fast Response and Precise Control Motion Balance for Easy Adjustment Characterization for Modification of Valve Characteristic Fast Dynamic Response via High Pressure Valves and Large Ports Precision Positioning via High Gain Circuit and Rigid Components Double and Single Acting Modes of Operation Bypass Factory Optional	100 PSIG	3/4" - 4"	Extends or Retracts	±1% of Span



GP50 / GP51 / GP52 Series

Product performance

High Pressure - Natural Gas Regulator



High Pressure - Natural Gas Regulator

Product Series / Features (Pressure Reducing)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
HPNGV1 Heavy Duty Engine Applications Integral Pressure Relief Device High Flow Capacity Multiple Porting Configurations Hot Engine Coolant Routed through Regulator to Prevent Freeze Up Bypass Design - Provides Minimal Pressure Drop with Increasing Flow	3600 PSIG	45-150 PSIG	110 lbs/hr	Aluminum

Snap-Acting Relays



GVB11 / GVB12 Series

Product Series / Features (Snap Acting)	Inlet Pressure (maximum)	Outlet Pressure Ranges	Flow Capacity	Body Material
GVB11 / GVB12 Snap-Acting Relays Switch from Main to Auxiliary Supply Pressure Aluminum and Stainless Steel Construction Lock Actuator in Last Position Extend or Retract an Actuator Stem Divert Flow or Pressure from One Device to Another Multiple Elastomer Selections Offered	150 PSIG	25-85 PSIG	Cv = 0.38	Aluminum 303SS

Product performance

Diaphragm Seals - Threaded and Flanged Models

Product Series / Features (All Series)	Diaphragm Style	Diaphragm Displacement Cubic Inches	Maximum Working Pressure (PSIG)	Process Connection Size	Wetted Material (All Units)
Threaded Off-Line Process Connection					
100A / 100AC Series	Replaceable	0.08 / 0.14	200 to 10000	1/4" - 1-1/2" NPT	Carbon Steel
140K / 140KT Series	All Welded	0.02	2000 to 5000	1/8" - 1/2" NPT	316SS
190K Series	All Welded	0.028	1000	1/4" - 1" NPT	316LSS
300A / 330A / 600A Series	Welded	0.05 / 0.16 / 0.24	1250 to 20000	1/4" - 1-1/2" NPT	304SS
400A / 400AC Series	Replaceable	1.4	200	1/4" - 1-1/2" NPT	304LSS
360A Series	All Welded	0.05	2500	1/4" - 1-1/2" NPT	
Threaded In-Line Process Connection					Carpenter 20 CB-3
100AM Series	Replaceable	0.09	1000 to 2000	1/4" - 1" NPT	Hastelloy B3
300AM Series	Welded	0.05	1250 to 2500	1/4" - 1" NPT	Hastelloy C276
Flanged Off-Line Process Connection					Inconel 600
100B Series	Replaceable	0.09	(For All Units)	1/2" - 3"	Monel 400
300B Series	Welded	0.05	150# to 2500#	1/2" - 3"	Nickel 200
360B Series	Welded	0.05	Raised Faced	1/2" - 3"	Kynar
300BX Series	Welded	0.05	Flat Faced	1/2" - 3"	Polypropylene
330B Series	Welded	0.15	Ring Type Joint	1/2" - 3"	PVC
400B Series	Replaceable	1.4	Special Connections	1/2" - 3"	Teflon - CF
600B Series	Welded	0.25		1/2" - 3"	Teflon - GF
					Titanium
					Tantalum



140K Series



300A Series



300B Series

Product performance

Diaphragm Seals - Specialty Models

Product Series / Features (All Series)	Diaphragm Style	Diaphragm Displacement Cubic Inches	Maximum Working Pressure (PSIG)	Process Connection Size	Wetted Material (All Units)
Saddle Welded Process Connection					
100J3 / 100J4 Series	Replaceable	0.09	Sch. 5 to Sch. 160	3" - 4"	Carbon Steel
300J3 / 300J4 Series	Welded	0.05	Sch. 5 to Sch. 160	3" - 4"	316SS
Butt Welded In-Line Process Connection					
100L Series	Replaceable	0.09	Sch. 5 to Sch. 160	1/4" - 1"	316LSS
300L Series	Welded	0.05	Sch. 5 to Sch. 160	1/4" - 1"	304SS
Socket Welded In-Line Process Connection					
100M Series	Replaceable	0.09	Sch. 5 to Sch. 160	1/4" - 1"	Carpenter 20 CB-3
300M Series	Welded	0.05	Sch. 5 to Sch. 160	1/4" - 1"	Hastelloy B3
Flanged In-Line Process Connection					
100N Series	Replaceable	0.09	150# thru 2500# RF	1" - 3"	Hastelloy C276
300N Series	Welded	0.05	150# thru 2500# RF	1" - 3"	Inconel 600
Socket Welded In-Line Process Connection					
100S Series	Replaceable	0.09	Sch. 5 to Sch. 160	1/4" - 1"	Monel 400
300S Series	Welded	0.05	Sch. 5 to Sch. 160	1/4" - 1"	Nickel 200
Flanged Off-Line Process Connection					
300BP Pancake Series	Welded	0.25	150# - 300#	3"	Kynar
300BT "T" Type Series	Welded	0.25	150# - 300#	3"	Polypropylene
600TW Taylor Wedge Series	Welded	0.25	1500 PSIG	Wedge	PVC
					Teflon - CF
					Teflon - GF
					Titanium
					Tantalum



Product performance

Diaphragm Seals - Sanitary Models

Product Series / Features (All Series)	Diaphragm Style	Diaphragm Displacement Cubic Inches	Piping System	Process Connection Size	Wetted Material (All Units)
Sanitary Diaphragm Seals					
700C-115 Series	Welded	0.02	All Units	1-1/2"	316SS
700C-120 Series	Welded	0.028	Ladish Tri-Clamp	2"	316SS
700C-125 Series	Welded	0.04	Cherry Burrell "S" Line	2-1/2"	316SS
700C-130 Series	Welded	0.04	G & H GC Fast Clamp	3"	316SS
700C-220 Series	Welded	0.028	All Units	2"	316SS
700C-230 Series	Welded	0.04	CB "I" Line	3"	316SS
700C-240 Series	Welded	0.04		4"	316SS
700C-320 Series	Welded	0.028	Cherry Burrell "Q" Line	2"	316SS
700C-420 Series	Welded	0.028	C & H GC "H" Line	2"	316SS
700C-520 Series	Welded	0.028	APC Quick Connect	2"	316SS
700A-628 Series	Welded	0.028	Anheuser Busch	2"	316SS
700A-626 Series	Welded	0.028	Anheuser Busch	2"	316SS
700D-820 Series	Welded	0.028	Ashcroft Replacement	2"	316SS
700CEX Series	Welded	As Designed	As Designed	As Designed	As Designed
700C-7 Extended	Welded	0.15	4" Tri-Clamp	Tank Spud	316SS



700C Series



700C Series

Product performance

Diaphragm Seals - Mounting and Filling Accessories

Product Series / Features (All Series)

Diaphragm Seals Accessories

Mounting Options

Direct Mount
Nipple Mount
Capillary Mount

Mounted Directly to Customer Instrument
2" and 4" Long Nipples
5' to Desired Length of Stainless Steel Armored or PVC Armored
Capillary

Fill and Calibration Options


Mount / Fill / Calibrate to Customer Supplied Instrument
Fill Fluids Offered

Silicones, Pure Glycerine, Fluorolube, Halocarbons, Ethylene Glycol,
Propylene Glycol, Syltherm, Neobee and Mineral Oil

Calibration Rings

3" 150# and 300# Flange

Single and Dual Flush Ports

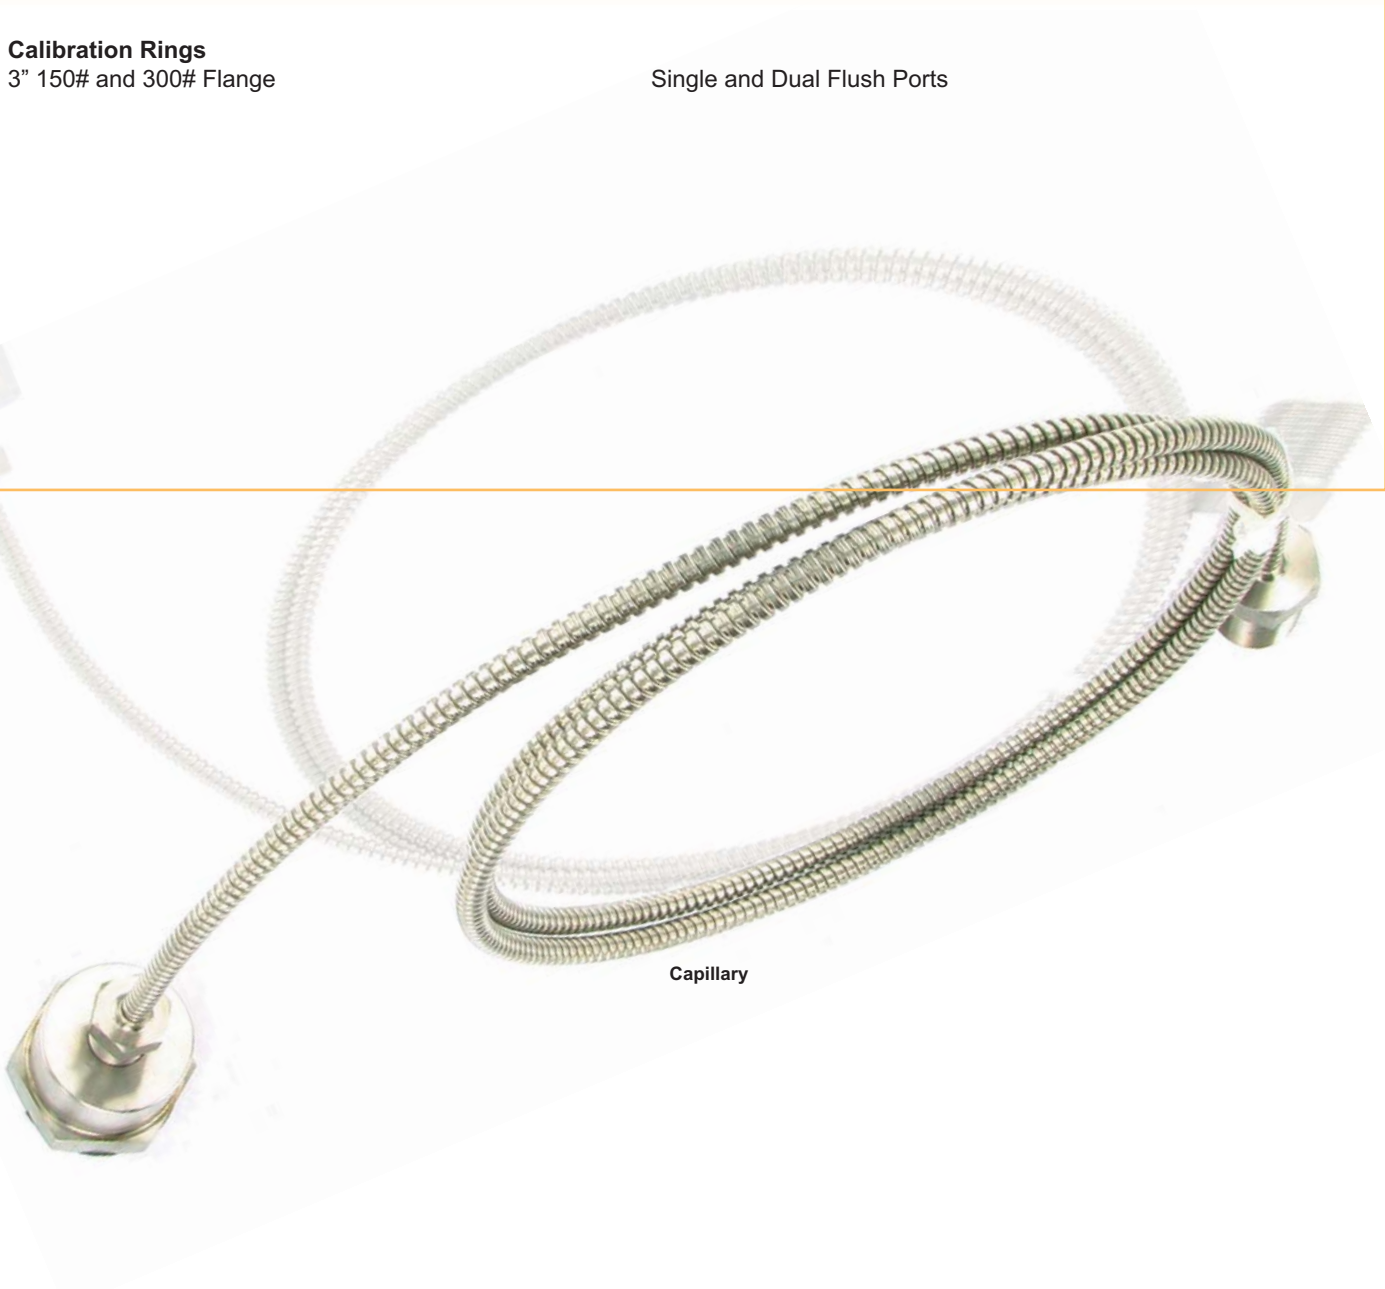

ITT Corporation

ITT Conoflow

5154 Highway 78
St. George, SC 29477
Ph: 843.563.9281
Fx: 843.563.2131

Please visit our web site at www.conoflow.com
or email us at conoflow_info@itt.com



Engineered for life